

TECHNICAL DATA SHEET

Novatik® NATURE | ROMAN

With its warm colours, smooth slopes and broad curves, Novatik NATURE ROMAN perfectly captures the ageless appeal of sunbaked Mediterranean roofs, but unlike traditional terracotta tiles our Novatik NATURE ROMAN panels are lightweight and immensely strong. Novatik NATURE ROMAN panels are produced using premium quality steel, protected with ZnMg 0,82 oz/sq ft (250 g/sqm) alloy plus additional multiface® anti-corrosion protection on both sides and covered with natural volcanic stone chips. The multiface® protective layer represents a high-performance treatment applied to steel, with a thickness of 1 to 2 microns, and is an almost invisible (thin organic coating) sealant applied to hot-dip galvanized steel strips (ZnMg). Its remarkable properties give the steel a durable premium sealing, with excellent corrosion resistance and superior adhesion of subsequent finishing layers

TRANSPARENT ACRYLIC COATING

TEXTURED FINISH
(VOLCANIC ROCK CHIPS)

BASE LAYER / COAT


MULTIFACE® PRIMER

PROTECTIVE LAYER ZN-MG

STEEL

PROTECTIVE LAYER ZN-MG

MULTIFACE® PRIMER

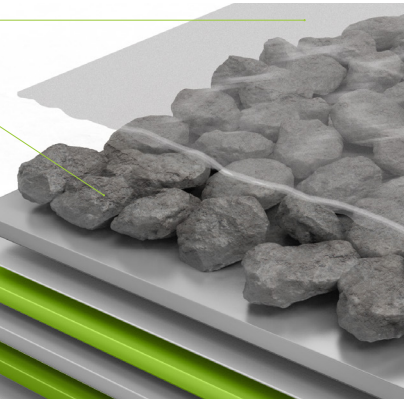

30


YEARS

AESTHETICS
WARRANTY




60

YEARS

TECHNICAL
WARRANTY

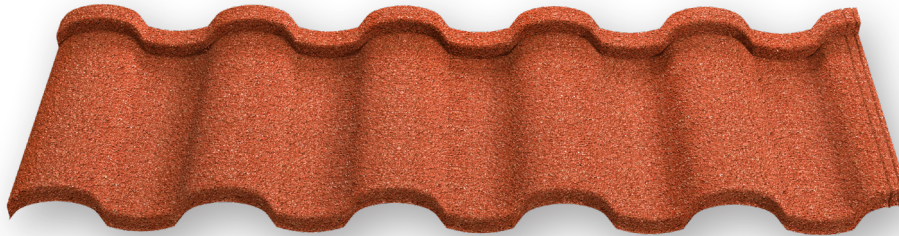

COLOURS:



TECHNICAL INFORMATION

TOTAL LENGTH	52" (1320 mm)
LENGTH OF COVER	50" (1270 mm)
WIDTH OF COVER	14-9/16" (370 mm)
PANELS / SQ	20,6 (2.15 panels/sqm)
MINIMUM ROOF PITCH	3/12 (14°)
WEIGHT / SQ	148,15 lbs (7 kg/sqm)
BATTEN SPACING	14-9/16" (370 mm)
STEEL TYPE / STEEL THICKNESS	DX51 / Gauge 26; (0,45 mm)
CORROSION RESISTANCE	Protective Layer ZnMg 0.82 oz/sq ft. (250 g/sqm) + multiface® anti-corrosion protection
TEXTURED FINISHED	Acrylic resin + Volcanic rock (Basalt) + Protective layer
TOTAL MAXIMUM THICKNESS	1/16" (2.1 mm)

Manufactured by: NOVATIK SRL

DISTRIBUTED by: NOVATIK Distribution, LLC Tel: +1 786 512-9248, +1 239 470-7130 office@novatik.us, novatik.us
Novatik NATURE ROMAN Technical Data Sheet | January 2023