TECHNICAL DATA SHEET

Novatik® NATURE | WOOD

Novatik NATURE WOOD captures the natural beauty of a wood shingle roof. Long lasting, easy and quick to install and low maintenance, the modern materials used in its manufacture overcome the disadvantages of a traditional wood roof. Novatik NATURE WOOD is the ideal choice for those who are seeking a roof with a more rustic appeal.

Novatik NATURE WOOD panels are produced using premium quality steel, protected with ZnMg 0,82 oz/sq ft (250 g/sqm) alloy plus additional multiface® anticorrosion-protection on both sides, and covered with natural volcanic stone chips. The multiface® protective layer represents a high performance treatment applied to steel, with a thickness of 1 to 2 microns, and is an almost invisible (thin organic coating) sealant applied to hot-dip galvanized steel strips (ZnMg). Its remarkable properties give the steel a durable premium sealing, with excellent corrosion resistance and superior adhesion of subsequent finishing layers.




30

AESTHETICS

60

YEARS TECHNICAL WARRANTY

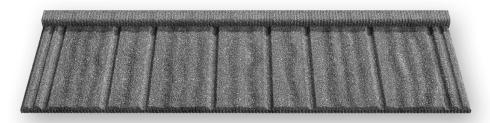

COLOURS:











BLACK VOLCANO



TECHNICAL INFORMATION

TOTAL LENGTH	54-1/8" (1375 mm)
LENGTH OF COVER	51-3/4" (1315 mm)
WIDTH OF COVER	14-9/16" (370 mm)
PANELS / SQ	20 (2.09 panels/sqm)
MINIMUM ROOF PITCH	3/12 (14°)
WEIGHT / SQ	151.52 lbs (7,16 kg/sqm)
BATTEN SPACING	14-9/16" (370 mm)
STEEL TYPE / STEEL THICKNESS	DX51 / Gauge 26; (0,45 mm)
CORROSION RESISTANCE	Protective Layer ZnMg
	0.82 oz/sq ft. (250 g/sqm) +
	multiface® anti-corrosion protection
TEXTURED FINISHED	Acrylic resin + Volcanic rock (Basalt)
	+ Protective layer
TOTAL MAXIMUM THICKNESS	1/16" (2.1 mm)