



Meyer Burger Black


Product type: MB_B120AyB_XXX


375 – 395 Wp


For maximum yields combined with outstanding design: Heterojunction high-performance solar module with SmartWire Connection Technology (SWCT®).


- 


Made in Germany. Designed in Switzerland.
Production and development according to the highest quality standards.
- 

Highly profitable
More energy yield over the same area even on cloudy or hot days.
- 



Extremely durable
Outstanding cell stability and high breakage resistance thanks to patented SmartWire Connection Technology.
- 

Consistently sustainable
Regional value creation, made without lead and PFAS, produced using 100 % renewable energy.
- 

Guaranteed reliability
Industry-leading 25-year product and performance warranty.
- 


Extremely aesthetic
Elegant Swiss design suitable for all roof shapes and sophisticated architecture.
- 

Extremely practical
Convenient handling, maximum layout flexibility and maximum system performance thanks to compact format.

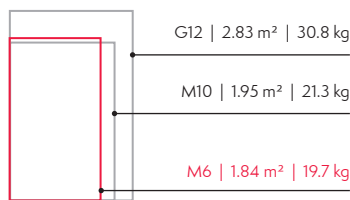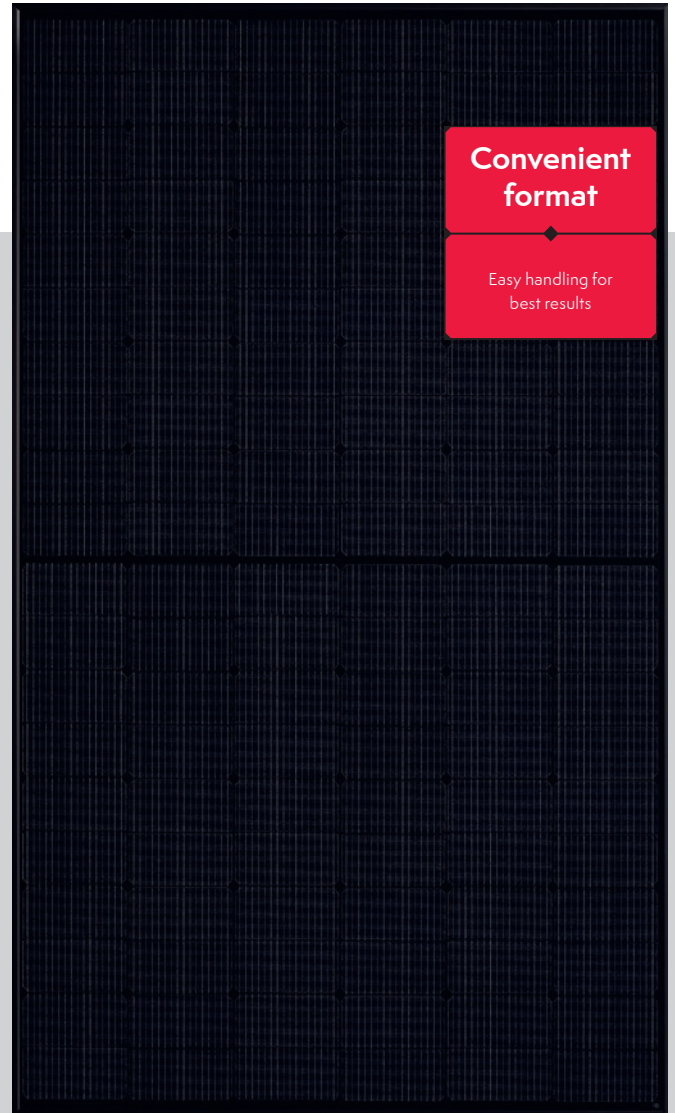

* Size formats compared

○ Meyer Burger
○ Market average

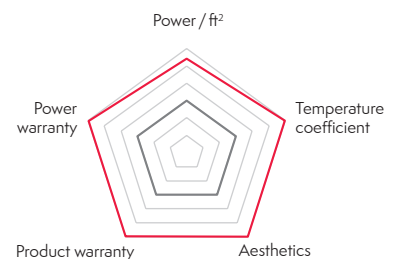


Mechanical specification

Dimensions [mm / in]	1767 x 1041 x 35 / 69.6 x 41.0 x 1.4
Weight [kg / lbs]	19.7 / 43.4
Front cover	Tempered solar glass, 3.2 mm / 0.13 in, with anti-reflective surface
Back cover	Black water-barrier backsheet
Frame	Black anodized aluminum
Solar cell type	120 half-cells, mono n-Si, HJT with SWCT® bifacial cell technology
Junction boxes	3 diodes, IP68 rated in accordance with IEC 62790
Cable	PV cable 4 mm ² / 12 AWG, 1.2 m / 47.2 in length in accordance with EN 50618
Connectors	1: MC4; 2: MC4-Evo2; 3: UKT Energy PV-CO02; 4: TE Connectivity PV4-S1 in accordance with IEC 62852, IP68 rated only when connected

Packages

70.0 in	41.3 in	51.2 in	1433 lbs	30 modules	max. 2 pallets	30 / 900 pallets / modules	26 / 780

Delivery by container or truck. For truck freight, 0.78 loading meters per pallet and stacking factor 2 apply.

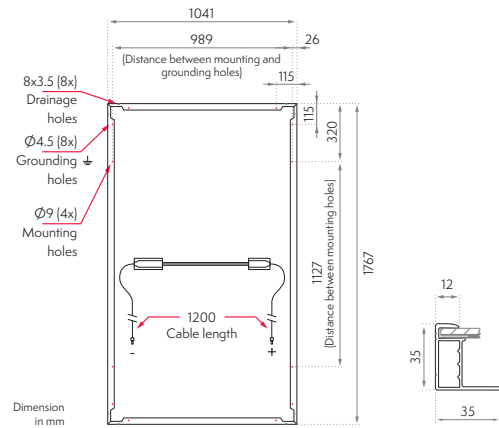

Electrical specification¹

Product type: MB_B120AyB_XXX*

Power class	Efficiency		Power**		Short circuit current		Open circuit voltage		Current		Voltage	
	η	η	P_{max}	P_{max}	I_{sc}	I_{sc}	V_{oc}	V_{oc}	I_{mpp}	I_{mpp}	V_{mpp}	V_{mpp}
	[%]	[%]	[W]	[W]	[A]	[A]	[V]	[V]	[A]	[A]	[V]	[V]
	STC ²		NMOT ³	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC
375	20.4		283	375	8.5	10.6	42.2	44.4	7.9	9.9	35.7	37.8
380	20.7		287	380	8.5	10.6	42.2	44.5	8.0	10.0	36.1	38.2
385	20.9		291	385	8.5	10.6	42.3	44.6	8.0	10.0	36.4	38.5
390	21.2		294	390	8.5	10.6	42.4	44.6	8.0	10.1	36.7	38.9
395	21.5		298	395	8.5	10.6	42.4	44.7	8.1	10.1	37.0	39.2

* XXX = power class, y = connector type ** Power tolerance -0 W / +5 W for STC

Temperature coefficients

Temperature coefficient of I_{sc}	α	[%/K]	+0.033
Temperature coefficient of V_{oc}	β	[%/K]	-0.234
Temperature coefficient of P_{mpp}	γ	[%/K]	-0.259
Nominal Module Operating Temperature	NMOT ³	[°F]	111±3.6

The temperature coefficients stated are linear values.

Properties for system design

Max. system voltage	[V]	1000
Overcurrent protection rating	[A]	20
Max. test load +/- (downforce / uplift)*	[lbs/ft ²]	125.3/83.5
Max. design load +/- (downforce / uplift)	[lbs/ft ²]	83.5/55.6
Safety class		II
Fire type (UL 61730)		2
Operation temperature	[°F]	-40 to +185

*Safety factor for test load = 1.5

Certificates

IEC 61215:2016, IEC 61730:2016, UL 61730-1, UL 61730-2, PID (IEC 62804), Salt Mist (IEC 61701)


Notice: All data and specifications are preliminary and subject to change without notice.

For installation and operating instruction, please refer to installation guide, version 1.0.5_UL




Visit us at meyerburger.com

I-V curves at different irradiances

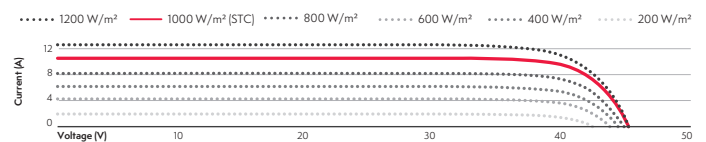

Meyer Burger warranty

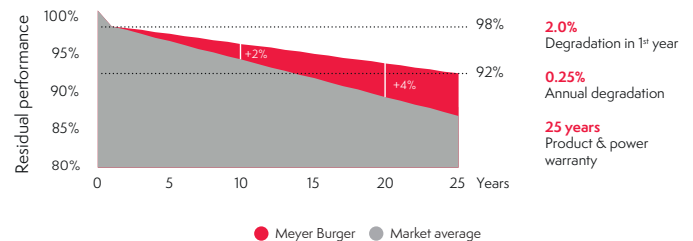

Test procedure according to IEC standard

Market standard	1x IEC
Meyer Burger materials testing	3x IEC

¹Measurement according to IEC 60904-3, measurement tolerance: ±3%
²STC: Irradiance 1000 W/m², module temperature 25°C, AM1.5G Spectrum
³NMOT: Nominal Module Operating Temperature, with irradiance 800 W/m², AM1.5G spectrum, ambient temperature 20°C