



KuPower

HIGH EFFICIENCY MONO MODULE

CS3K-300|305|310|315MS

With Canadian Solar's industry leading mono-PERC cell technology and the innovative LIC (Low Internal Current) module technology, we are now able to offer our global customers high power mono modules up to 315 W.

The KuPower mono modules with a dimension of 1675 x 992 mm, close to our 60 cell SuperPower modules, have the following unique features:


- Higher power classes for equivalent module sizes
- High module efficiency up to 18.96 %
- LOW hot spot temperature risk
- LOW temperature coefficient (Pmax): -0.37 % / °C
- LOW NMOT (Nominal Module Operating Temperature): $42 \pm 2 \text{ }^\circ\text{C}$



More power output thanks to low NMOT: $42 \pm 2 \text{ }^\circ\text{C}$




Low power loss in cell connection



Safer: lower hot spot temperature



Heavy snow load up to 5400 Pa, wind load up to 2400 Pa*

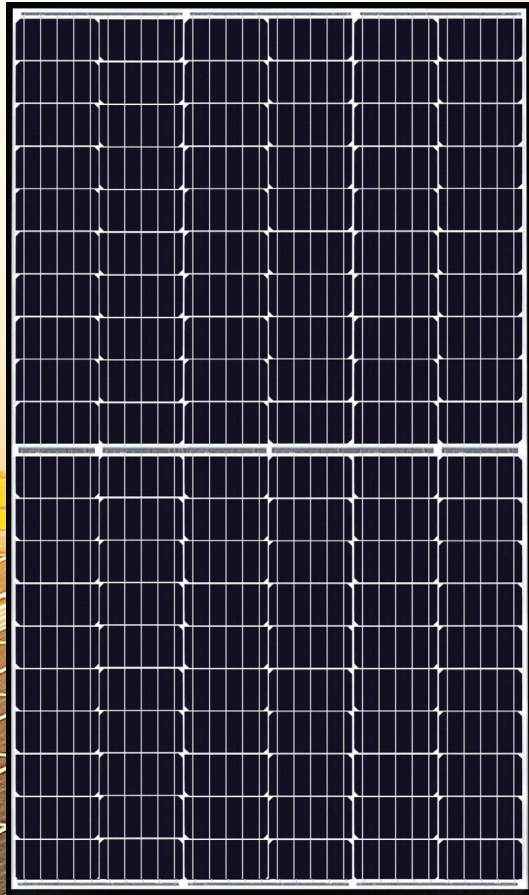

linear power output warranty



product warranty on materials and workmanship

PRODUCT CERTIFICATES**

IEC 61215 / IEC 61730: 2005 & 2016: VDE / CE / UL 1703: CSA



* For detailed information please refer to Installation Manual.

** Please contact your local Canadian Solar sales representative for the specific product certificates applicable in your market.

