
## **TECHNICAL DATA SHEET**

## Novatik NATURE | SLATE

All the appearance of natural slates, combined with the strength of steel and the weather resistance of a rock chip coating, this minimalist design is an ideal choice for those seeking a more modern look. With its flat profile and neutral colour, NATURE SLATE is suitable for both vertical and pitched roofs, perfectly meeting the needs of contemporary architectural design.

Novatik NATURE SLATE panels are produced using premium quality steel, protected with ZnMg 0,82 oz/sq ft (250 g/sqm) alloy plus additional multiface® anti-corrosion protection on both sides, and covered with natural volcanic stone chips. The multiface® protective layer represents a high-performance treatment applied to steel, with a thickness of 1 to 2 microns, and is an almost invisible (thin organic coating) sealant applied to hot-dip galvanized steel strips (ZnMg). Its remarkable properties give the steel a durable premium sealing, with excellent corrosion resistance and superior adhesion of subsequent finishing layers.

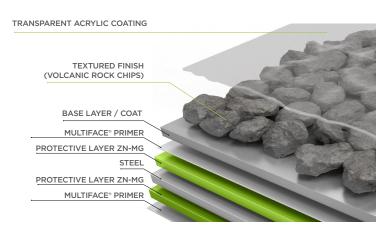

30

AESTHETICS

60

YEARS TECHNICAL WARRANTY



## COLOURS:



DARK MOON



SILVER MOON



BROWN EARTH



## TECHNICAL INFORMATION

TOTAL LENGTH	50-3/8" (1280 mm)
LENGTH OF COVER	48-1/4" (1225 mm)
WIDTH OF COVER	14-9/16" (370 mm)
PANELS / SQ	20,8 (2.17 panels/sqm)
MINIMUM ROOF PITCH	3/12 (14°)
WEIGHT / SQ	148,15 lbs (6.7 kg/sqm)
BATTEN SPACING	14-9/16" (370 mm)
STEEL TYPE / STEEL THICKNESS	DX51 / Gauge 26; (0,45 mm)
CORROSION RESISTANCE	Protective Layer ZnMg
	0.82 oz/sq ft. (250 g/sqm) +
	multiface® anti-corrosion protection
TEXTURED FINISHED	Acrylic resin + Volcanic rock (Basalt)
	+ Protective layer
TOTAL MAXIMUM THICKNESS	1/16" (2.1 mm)